

xE910 Mini PCIe Hardware User Guide

1w0301006 Rev.11 – 2017-05-15



*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***Notice**

While reasonable efforts have been made to assure the accuracy of this document, Telit assumes no liability resulting from any inaccuracies or omissions in this document, or from use of the information obtained herein. The information in this document has been carefully checked and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies or omissions. Telit reserves the right to make changes to any products described herein and reserves the right to revise this document and to make changes from time to time in content hereof with no obligation to notify any person of revisions or changes. Telit does not assume any liability arising out of the application or use of any product, software, or circuit described herein; neither does it convey license under its patent rights or the rights of others.

It is possible that this publication may contain references to, or information about Telit products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that Telit intends to announce such Telit products, programming, or services in your country.

Copyrights

This instruction manual and the Telit products described in this instruction manual may be, include or describe copyrighted Telit material, such as computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and its licensors certain exclusive rights for copyrighted material, including the exclusive right to copy, reproduce in any form, distribute and make derivative works of the copyrighted material. Accordingly, any copyrighted material of Telit and its licensors contained herein or in the Telit products described in this instruction manual may not be copied, reproduced, distributed, merged or modified in any manner without the express written permission of Telit. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit, as arises by operation of law in the sale of a product.

Computer Software Copyrights

The Telit and 3rd Party supplied Software (SW) products described in this instruction manual may include copyrighted Telit and other 3rd Party supplied computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and other 3rd Party supplied SW certain exclusive rights for copyrighted computer programs, including the exclusive right to copy or reproduce in any form the copyrighted computer program. Accordingly, any copyrighted Telit or other 3rd Party supplied SW computer programs contained in the Telit products described in this instruction manual may not be copied (reverse engineered) or reproduced in any manner without the express written permission of Telit or the 3rd Party SW supplier. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit or other 3rd Party supplied SW, except for the normal non-exclusive, royalty free license to use that arises by operation of law in the sale of a product.



Contents

1. INTRODUCTION.....	7
1.1. SCOPE	7
1.2. AUDIENCE.....	7
1.3. CONTACT INFORMATION, SUPPORT.....	7
1.4. TEXT CONVENTIONS	8
1.5. RELATED DOCUMENTS	8
2. OVERVIEW	9
3. XE910 MINI PCI EXPRESS CARD CONNECTIONS.....	10
3.1. PIN-OUT.....	10
3.2. ANTENNA CONNECTORS	11
4. POWER SUPPLY	13
4.1. POWER SUPPLY REQUIREMENTS	13
4.2. POWER CONSUMPTION.....	14
5. GSM/WCDMA/LTE /CDMA RADIO SECTION	15
5.1. xE910 MINI PCI PRODUCT VARIANTS.....	15
5.2. TX AND RX CHARACTERISTICS.....	15
5.3. GSM/WCDMA/LTE/CDMA ANTENNA REQUIREMENTS	17
5.3.1. GSM/WCDMA/LTE/CDMA Antenna - Installation Guidelines.....	21
5.4. ANTENNA DIVERSITY REQUIREMENTS.....	22
5.5. GNSS RECEIVER.....	26
5.5.1. GNSS Performances	26
5.5.2. GNSS RF Front End Design.....	27
6. LOGIC LEVEL SPECIFICATIONS	28
7. USB PORT.....	28
7.1. USB 2.0 HS	28
8. SIM INTERFACE	29
9. CONTROL SIGNALS.....	30
9.1. WAKE#.....	30
9.2. W_DISABLE#	32
9.3. LED_WWAN#.....	32
9.4. PERST#.....	32
10. AUDIO SECTION OVERVIEW	33
10.1. ELECTRICAL CHARACTERISTICS	34
10.2. CODEC EXAMPLE.....	34
11. MECHANICAL SPECIFICATIONS	35
11.1. WEIGHT	36
11.2. ENVIRONMENTAL REQUIREMENTS.....	36
12. PACKING SYSTEM.....	37
13. SAFETY RECOMMANDATIONS.....	38
14. CONFORMITY ASSESSMENT ISSUES	39



1.4. Text Conventions



Danger – This information MUST be followed or catastrophic equipment failure or bodily injury may occur.



Caution or Warning – Alerts the user to important points about integrating the module, if these points are not followed, the module and end user equipment may fail or malfunction.



Tip or Information – Provides advice and suggestions that may be useful when integrating the module.

All dates are in ISO 8601 format, i.e. YYYY-MM-DD.

1.5. Related Documents

- HE910/UE910 AT Commands Reference Guide 80378ST10091a
- HE910 Hardware User Guide 1v03700925
- Event Monitor Application Note 80000nt10043a
- Digital Voice Interface Application Note 80000NT10004a
- LE910 AT Commands Reference Guide 80378ST10585a
- LE910 Hardware User Guide 1v03701089
- LE910 Digital Voice Interface Application Note 80000NT11246a
- DE910 Hardware User Guide 1v03700951
- LE910-V2 Modules AT Commands Reference Guide 80446ST10707A
- LE910-V2 Hardware User Guide 1VV0301200



3. xE910 Mini PCI express card connections

3.1. PIN-OUT

This product has a standard Mini PCI express connector, excepting the (4) audio signals which use normally reserved connectors.

Pin	Signal	I/O	Function	Type
Power Supply				
2	3V3_AUX	O	3.3V supply	Power
24	3V3	O	3.3V supply	Power
39	3V3_AUX	O	3.3V supply	Power
41	3V3_AUX	O	3.3V supply	Power
52	3V3_AUX	O	3.3V supply	Power
4	GND	-	Ground	Power
9	GND	-	Ground	Power
15	GND	-	Ground	Power
18	GND	-	Ground	Power
21	GND	-	Ground	Power
26	GND	-	Ground	Power
27	GND	-	Ground	Power
29	GND	-	Ground	Power
34	GND	-	Ground	Power
35	GND	-	Ground	Power
37	GND	-	Ground	Power
40	GND	-	Ground	Power
43	GND	-	Ground	Power
50	GND	-	Ground	Power
SIM Card Interface				
8	SIMVCC	O	External SIM signal – Power supply for the SIM	1.8 / 3V
10	SIMIO	I/O	External SIM signal - Data I/O	1.8 / 3V
12	SIMCLK	O	External SIM signal – Clock	1.8 / 3V
14	SIMRST	O	External SIM signal – Reset	1.8 / 3V
USB				
36	USB D-	I/O	USB differential Data (-)	0.3...2.8V
38	USB D+	I/O	USB differential Data (+)	0.3...2.8V

Pin	Signal	I/O	Function	Type
Miscellaneous Functions				



xE910 Mini PCIe Hardware User Guide

1vv0301006 Rev.11 – 2017-05-15

1	WAKE#	O	Active low signal used to wake up the system from stand-by	3.3V
20	WDISABLE#	I	Active low signal for wireless disabling (Flight mode)	3.3V
22	PERST#	I	Active low functional reset to the card	3.3V
42	LED_WWAN#	O	Active low, open drain signal for WWAN LED driving, used to provide module's status indication	3.3V...5V
Digital Voice Interface (DVI)				
45	PCM_CLK	I/O	Digital Audio Interface (CLK)	CMOS 1.8V
47	PCM_RX	I	Digital Audio Interface (RX)	CMOS 1.8V
49	PCM_TX	O	Digital Audio Interface (TX)	CMOS 1.8V
51	PCM_SYNC	I/O	Digital Audio Interface (SYNC)	CMOS 1.8V
N.C.				
3		-		
5		-		
6		-		
7		-		
11		-		
13		-		
16		-		
17		-		
19		-		
23		-		
25		-		
28		-		
30		-		
31		-		
32		-		
33		-		
44		-		
46		-		
48		-		

3.2. Antenna Connectors

The xE910 Mini PCIe adapter is equipped with a set of 50 Ω RF U.FL. connectors from Hirose U.FL-R-SMT-1(10).





xE910 Mini PCIe Hardware User Guide

1v0301006 Rev.11 – 2017-05-15

MAIN ANTENNA REQUIREMENTS for LE910-AU V2

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth	170 MHz in LTE Band 3 190 MHz in LTE Band 7 100 MHz in LTE Band 28
Impedance	50 ohm
Input power	> 24dBm Average power in WCDMA & LTE
VSWR absolute max	≤ 10:1 (limit to avoid permanent damage)
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

MAIN ANTENNA REQUIREMENTS for LE910-EU V2 and LE910-EU1

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth	250 MHz in LTE/WCDMA Band 1 170 MHz in LTE/WCDMA Band 3 / DCS1800 190 MHz in LTE Band 7 80 MHz in LTE/WCDMA Band 8 / GSM900 71 MHz in LTE Band 20
Impedance	50 ohm
Input power	> 24dBm Average power in WCDMA & LTE
VSWR absolute max	≤ 10:1 (limit to avoid permanent damage)
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

MAIN ANTENNA REQUIREMENTS for LE910-JN1

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth	250 MHz in LTE Band 1 60 MHz in LTE Band 19 63 MHz in LTE Band 21
Impedance	50 ohm
Input power	> 24dBm Average power in WCDMA & LTE
VSWR absolute max	≤ 10:1 (limit to avoid permanent damage)
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

MAIN ANTENNA REQUIREMENTS for LE910-EUG

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth (GSM/EDGE)	GSM900 : 80 MHz GSM1800(DCS) : 170 MHz
Bandwidth (WCDMA)	WCDMA band I(2100) : 250 MHz WCDMA band V(850) : 70 MHz



xE910 Mini PCIe Hardware User Guide

1vv0301006 Rev.11 – 2017-05-15

	WCDMA band VIII(900) : 80 MHz
Bandwidth (LTE)	LTE band III(1800) : 170 MHz LTE Band VII(2600) : 190 MHz LTE Band XX(800) : 71 MHz
Impedance	50 ohm
Input power	> 33dBm(2 W) peak power in GSM > 24dBm Average power in WCDMA & LTE
VSWR absolute max	≤ 10:1 (limit to avoid permanent damage)
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

MAIN ANTENNA REQUIREMENTS for LE910-NAG

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth (GSM/EDGE)	GSM850 : 70 MHz GSM1900(PCS) : 140 MHz
Bandwidth (WCDMA)	WCDMA band II(1900) : 140 MHz WCDMA band V(850) : 70 MHz
Bandwidth (LTE)	LTE Band II(1900) : 140 MHz LTE Band IV(1700) : 445 MHz LTE Band V (850) : 70 MHz LTE Band XVII(700) : 42 MHz
Impedance	50 ohm
Input power	> 33dBm(2 W) peak power in GSM > 24dBm Average power in WCDMA & LTE
VSWR absolute max	≤ 10:1 (limit to avoid permanent damage)
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

MAIN ANTENNA REQUIREMENTS for LE910-NVG

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth (WCDMA)	WCDMA band II(1900) : 140 MHz WCDMA band V(850) : 70 MHz
Bandwidth (LTE)	LTE Band IV(1700) : 445 MHz LTE Band XIII(700) : 41 MHz
Impedance	50 ohm
Input power	> 24dBm Average power in WCDMA & LTE
VSWR absolute max	≤ 10:1 (limit to avoid permanent damage)
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

MAIN ANTENNA REQUIREMENTS for LE910-SVG

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for
------------------------	---



5.3.1. GSM/WCDMA/LTE/CDMA Antenna - Installation Guidelines

- Install the antenna in a place covered by the GSM/WCDMA/LTE/CDMA signal.
- If the device antenna is located greater than 20cm from the human body and there are no co-located transmitters then the Telit FCC/IC approvals can be re-used by the end product
- If the device antenna is located less than 20cm from the human body or there are no co-located transmitters then the additional FCC/IC testing may be required for the end product (Telit FCC/IC approvals cannot be reused)
- Antenna shall not be installed inside metal cases
- Antenna shall be installed also according antenna manufacturer instructions.



DIVERSITY ANTENNA REQUIREMENTS for LE910-NVG

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth (WCDMA)	WCDMA band II(1900) : 140 MHz WCDMA band V(850) : 70 MHz
Bandwidth (LTE)	LTE Band IV(1700) : 445 MHz LTE Band XIII(700) : 41 MHz
Impedance	50 ohm
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

DIVERSITY ANTENNA REQUIREMENTS for LE910-SVG

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth (LTE)	LTE Band IV(1700) : 445 MHz LTE Band XIII(700) : 41 MHz
Impedance	50 ohm
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

DIVERSITY ANTENNA REQUIREMENTS for HE910

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth (GSM/EDGE)	70 MHz in GSM850, 80 MHz in GSM900 & 140 MHz PCS band
Bandwidth (WCDMA)	70 MHz in WCDMA Band V 80 MHz in WCDMA Band VIII 140 MHz in WCDMA Band II 250 MHz in WCDMA Band I
Impedance	50 ohm
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)

DIVERSITY ANTENNA REQUIREMENTS for DE910-DUAL

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s)
Bandwidth	70 MHz in CDMA BC0 140 MHz in CDMA BC1
Impedance	50 ohm
VSWR recommended	≤ 2:1 (limit to fulfil all regulatory requirements)



5.5.2. GNSS RF Front End Design

The xE910 Mini PCIe adapter contains an integrated LNA and pre-select SAW filter. This allows the module to work well with a passive GPS antenna. If the antenna cannot be located near the xE910, then an active antenna (that is, an antenna with a low noise amplifier built in) can be used with an external dedicated power supply circuit.



NOTE:

Please refer to the Module's Hardware User Guide for detailed information about GPS operating modes and RF signal requirements.




8. SIM interface

The SIM pins provide the connections necessary to interface to a SIM socket located on the host device. Voltage levels over this interface comply with 3GPP standards.

SIM Card Interface				
8	SIMVCC	O	External SIM signal – Power supply for the SIM	1.8 / 3V
10	SIMIO	I/O	External SIM signal - Data I/O	1.8 / 3V
12	SIMCLK	O	External SIM signal – Clock	1.8 / 3V
14	SIMRST	O	External SIM signal – Reset	1.8 / 3V

Following picture depicts the external SIM recommended connections:

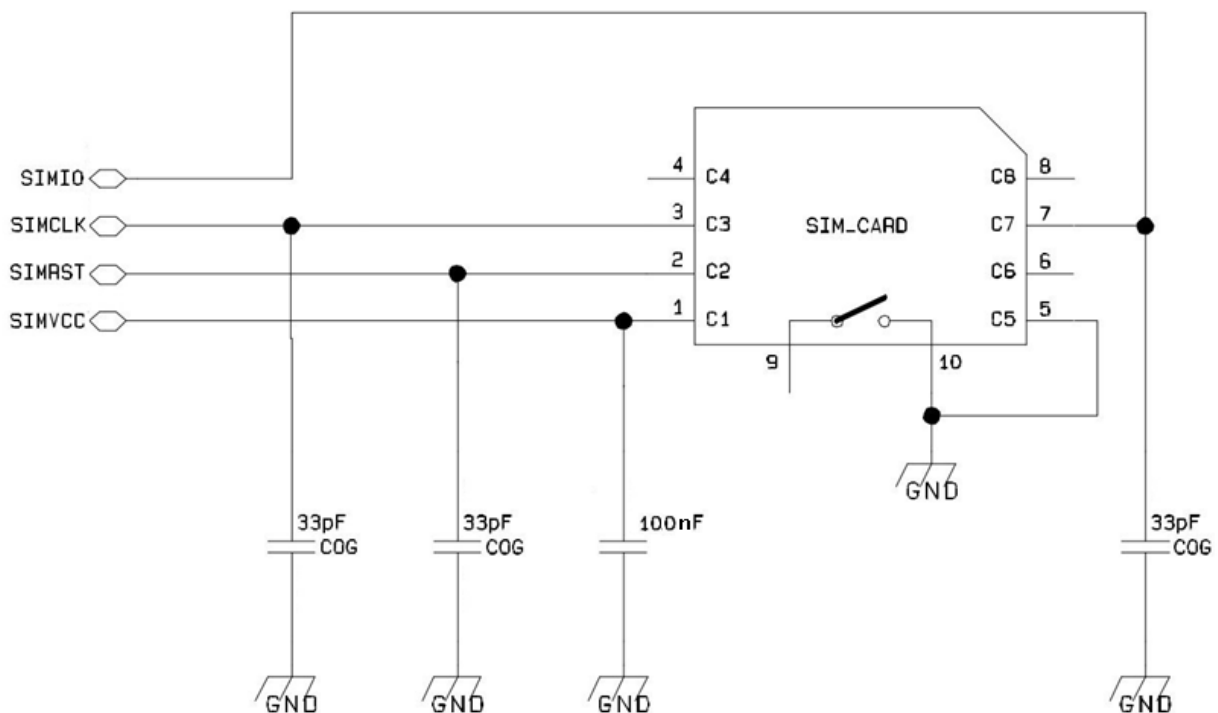

NOTE: DO NOT TERMINATE PINS 8, 10, 12, 14 WHEN USING MODEL INCLUDING SIM CARD HOLDER.



9. Control signals

The XE910 Mini PCIe provides signals for module control, as described in the following table:

Pin	Signal	I/O	Function	Type
1	WAKE#	O	Active low signal used to wake up the system from stand-by	3.3V
20	W_DISABLE#	I	Active low signal for wireless disabling (Airplane mode)	3.3V
22	PERST#	I	Active low functional reset to the card	3.3V
42	LED_WWAN#	O	Active low, open drain signal for WWAN LED driving, used to provide module's status indication	3.3V...5V

9.1. WAKE#

WAKE# is driven, by default, by the module according the PCI Express Mini Card Electromechanical Specification Revision 1.2.




NOTE: WAKE# IS NOT SUPPORTED IN HOST USING PCI EXPRESS MINI CARD ELECTROMECHANICAL SPECIFICATION REVISION 1.1 AND BELOW.



NOTE: THIS SIGNAL IS NOT ACTIVE BY DEFAULT. IF DESIRED IT CAN BE CONFIGURED REMAPPING AN EVENT UNDER MONITORING THROUGH AT#EVMONI. FOR DETAILS REFER TO THE AT COMMAND USER GUIDE



Following picture shows the internal WAKE# driver:

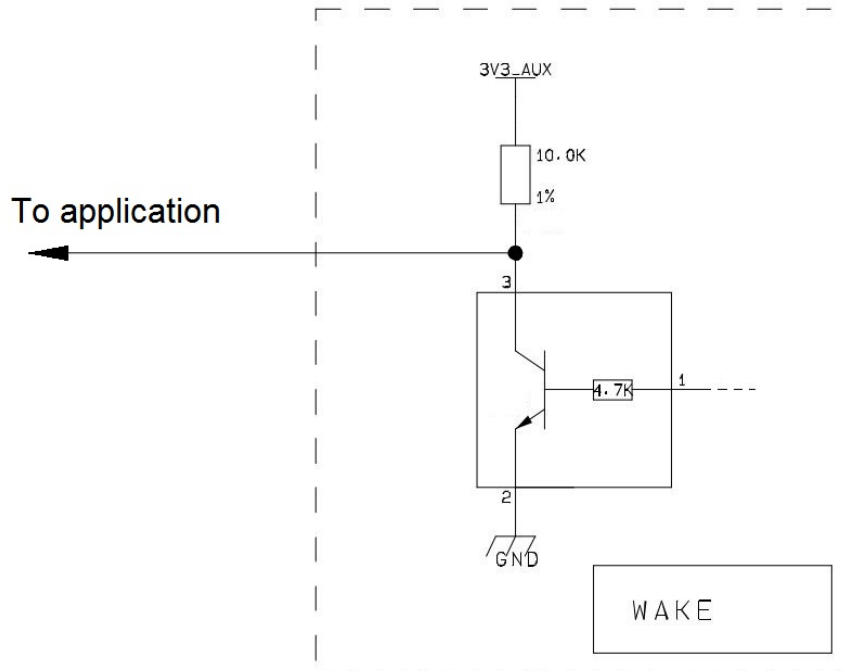

WAKE# output may be connected to an edge sensitive application input (e.g. a microcontroller input with IRQ enabled). No external pull-up is needed, since it is internally implemented.

EXAMPLE: In the following example, a RING monitor activates the WAKEUP signal. (cf. Event Monitor App.Note 80000nt10043a)

```

AT#ENAEVMONI=0 //disable all events
AT#GPIO=3,0,1 //Set GPIO3=>'0', "WAKE signal reset"
AT#ENAEVMONICFG=3,1,2 //AT port setting
AT#EVMONI="RING",0,1,3 //event 0-RING, after 3 rings
AT#EVMONI="RING",0,0,"AT#GPIO=3,1,1" //GPIO3=>'1', "WAKE signal active"
AT#EVMONI="RING",1 //event 0-RING enabled
AT#EVMONI="GPIO1",1,1,3 //event 1-GPIO3
AT#EVMONI="GPIO1",1,2,1 //when goes hi
AT#EVMONI="GPIO1",1,3,5 //after 5s
AT#EVMONI="GPIO1",1,0," AT#GPIO=3,0,1" //Set GPIO3=>'0', "WAKE signal
reset"
AT#EVMONI="GPIO1",1 //event 1-GPIO3 enabled
AT#ENAEVMONI=1 //enable all events
    
```




9.2. W_DISABLE#

W_DISABLE# is used to force the module to shut down. Thanks to its internal pull-up, leaving this pin unconnected allows the module to operate normally. This switch follows the behavior as described in the PCI-Express Mini Card specification.

9.3. LED_WWAN#

LED_WWAN# is driven, by default, by the module according the PCI Express Mini Card Electromechanical Specification Revision 1.1. If desired, LED behavior can be configured by adjusting software settings. The following picture shows the internal LED_WWAN# driver and its recommended connection to a LED:

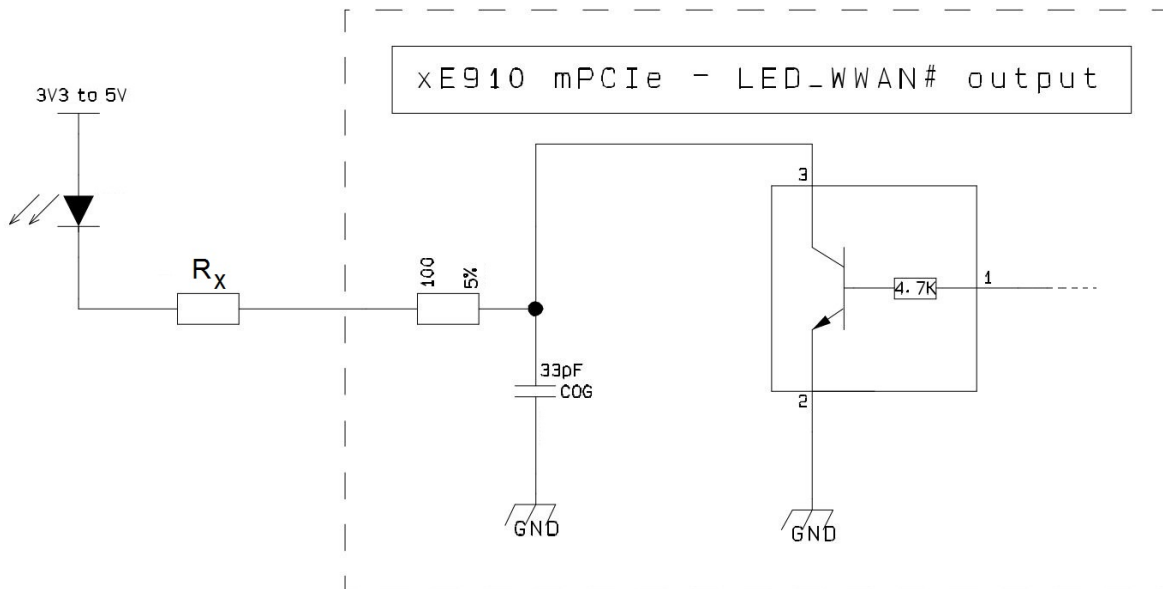

R_x should be dimensioned according to typical voltage drop on application LED and to its supply voltage (3V3 to 5V).



NOTE: THIS SIGNAL IS NOT ACTIVE BY DEFAULT. REFER TO AT#SLED DESCRIPTION IN THE AT COMMAND USER GUIDE

9.4. PERST#

Reset Signal

Signal	Function	I/O	Pin
--------	----------	-----	-----




11. Mechanical specifications

The xE910 Mini PCIe adapters have been designed to be compliant with a standard lead-free SMT process.

Moreover, it is compatible with the Mini PCIe card 52-pin card edge-type connector. The position of the antenna connectors is shown in the following picture.

Soldering pads are present on the back side of the adapter board to allow the optional mounting of a sim-holder. Starting from p/n HEPCxyyy204Tzzz the carrier board has been unified to the same used on the product DE910 Mini PCIe.

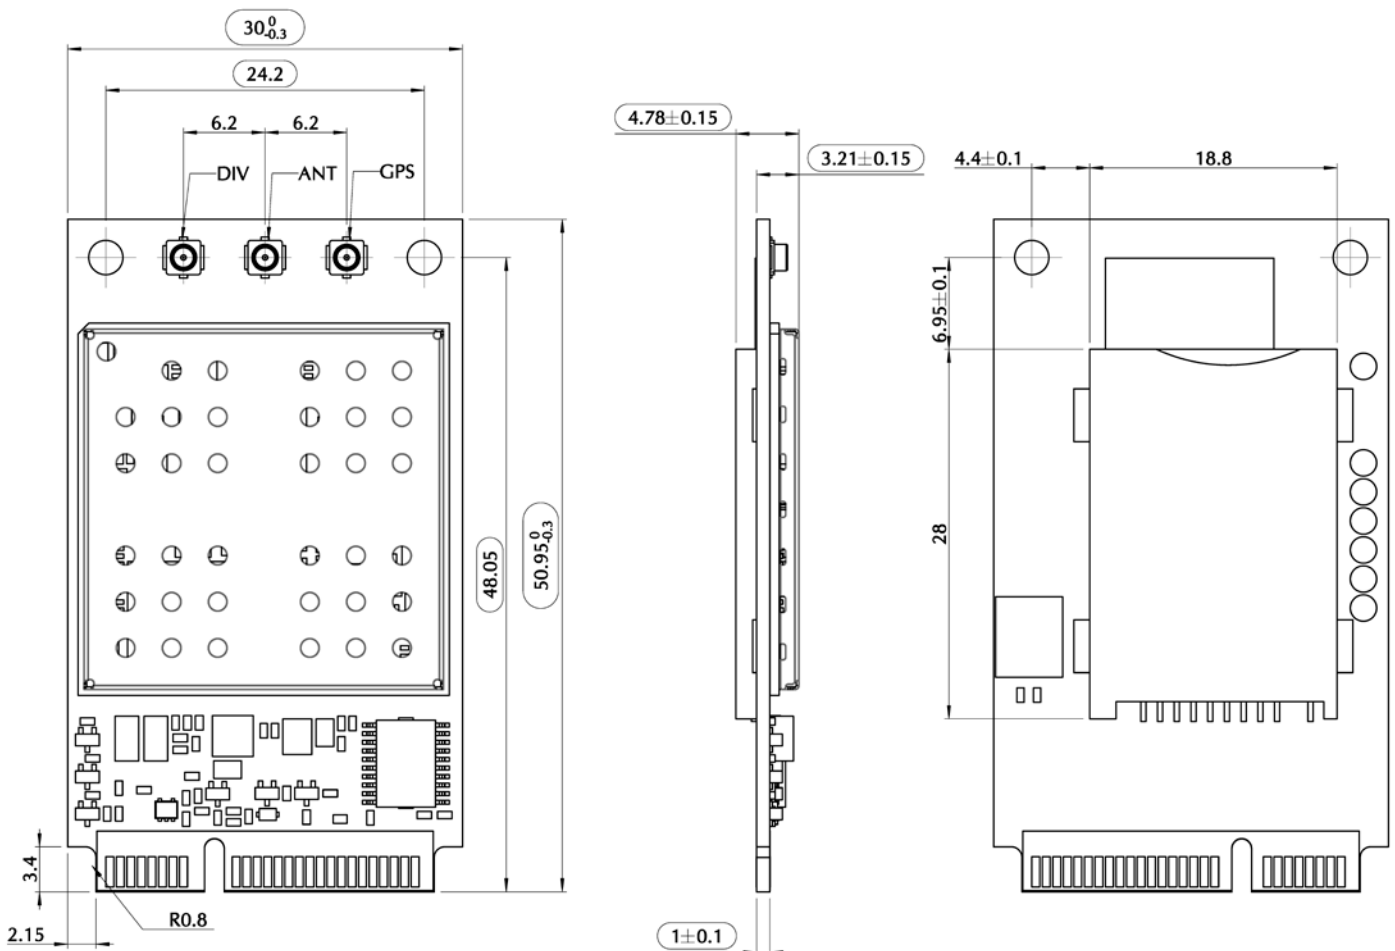

xE910 Mini PCIe Hardware User Guide

1v0301006 Rev.11 – 2017-05-15

The Telit xE910 Mini PCIe adapter overall dimensions are:

- Length: 51.0 mm
- Width: 30 mm
- Thickness: 3.2 mm
- Thickness(SIM holder version): 4.78 mm

The module complies with the standard dimensions specified in the *PCI Express Mini Card Electromechanical Specification Revision 1.1*

11.1. WEIGHT

The Telit xE910 Mini PCIe adapter weight is about 10 grams.

11.2. ENVIRONMENTAL REQUIREMENTS


Temperature range

Storage and operating Temperature Range	-40° ~ +85° C
---	---------------



12. Packing system

The XE910 Mini PCIe modules are packaged on trays of **20** pieces each.

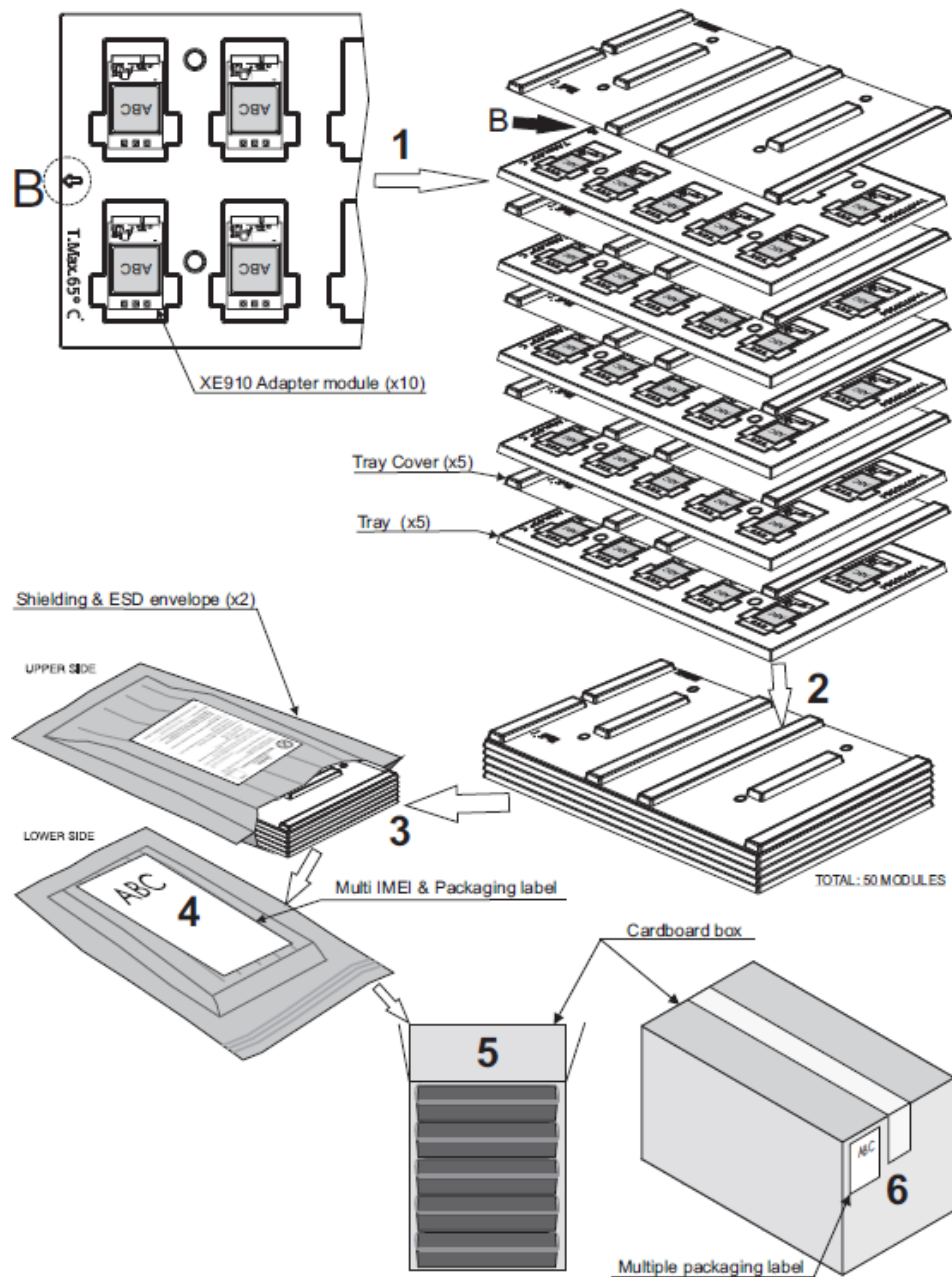

xE910 Mini PCIe Hardware User Guide

1v0301006 Rev.11 – 2017-05-15

Slovak	Telit Communications S.p.A. týmto vyhlasuje, že 2G/3G module spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
Slovenian	Telit Communications S.p.A. izjavlja, da je ta 2G/3G module v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
Spanish	Por medio de la presente Telit Communications S.p.A. declara que el 2G/3G module cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Swedish	Härmed intygar Telit Communications S.p.A. att denna 2G/3G module står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

In order to satisfy the essential requirements of 1999/5/EC Directive, the HE910 mPCIe is compliant to the following standards:

RF spectrum use (R&TTE art. 3.2)	EN 300 440-2 V1.4.1 EN 301 511 V9.0.2 EN 301 908-1 V6.2.1 EN 301 908-2 V6.2.1
EMC (R&TTE art. 3.1b)	EN 301 489-1 V1.9.2 EN 301 489-3 V1.4.1 EN 301 489-7 V1.3.1 EN 301 489-24 V1.5.1
Health & Safety (R&TTE art. 3.1a)	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 EN 62311:2008

In order to satisfy the essential requirements of 1999/5/EC Directive, the HE910-D mPCIe is compliant to the following standards:

RF spectrum use (R&TTE art. 3.2)	EN 301 511 V9.0.2 EN 301 908-1 V6.2.1 EN 301 908-2 V6.2.1
EMC (R&TTE art. 3.1b)	EN 301 489-1 V1.9.2 EN 301 489-7 V1.3.1 EN 301 489-24 V1.5.1
Health & Safety (R&TTE art. 3.1a)	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 EN 62311:2008

The conformity assessment procedure referred to in Article 10 and detailed in Annex V of Directive 1999/5/EC has been followed with the involvement of the following Notified Body:

CETECOM ICT SERVICES GMBH

Untertürkheimer Straße 6-10 66117

SAARBRÜCKEN

Country: Germany

Notified Body Number 0682.

Thus, the following marking is included in the product: **CE 0682**

The full declaration of conformity can be found on the following address:

<http://www.telit.com/>



14.3. 1999/5/EC Directive (LE910)

The LE910-EUG module has been evaluated against the essential requirements of the 1999/5/EC Directive.

Bulgarian	С настоящето Telit Communications S.p.A. декларира, че 2G/3G/LTE module отговаря на съществените изисквания и другите приложими изисквания на Директива 1999/5/EC.
Czech	Telit Communications S.p.A. tímto prohlašuje, že tento 2G/3G/LTE module je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
Danish	Undertegnede Telit Communications S.p.A. erklærer herved, at følgende udstyr 2G/3G/LTE module overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Dutch	Hierbij verklaart Telit Communications S.p.A. dat het toestel 2G/3G/LTE module in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
English	Hereby, Telit Communications S.p.A., declares that this 2G/3G/LTE module is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Estonian	Käesolevaga kinnitab Telit Communications S.p.A. seadme 2G/3G/LTE module vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
German	Hiermit erklärt Telit Communications S.p.A., dass sich das Gerät 2G/3G/LTE module in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
Greek	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Telit Communications S.p.A. ΔΗΛΩΝΕΙ ΟΤΙ 2G/3G/LTE module ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/EK.
Hungarian	Alulírott, Telit Communications S.p.A. nyilatkozom, hogy a 2G/3G/LTE module megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
Finnish	Telit Communications S.p.A. vakuuttaa täten että 2G/3G/LTE module tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
French	Par la présente Telit Communications S.p.A. déclare que l'appareil 2G/3G/LTE module est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Icelandic	Hér með lýsir Telit Communications S.p.A. yfir því að 2G/3G/LTE module er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC
Italian	Con la presente Telit Communications S.p.A. dichiara che questo 2G/3G/LTE module è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latvian	Ar šo Telit Communications S.p.A. deklarē, ka 2G/3G/LTE module atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lithuanian	Šiuo Telit Communications S.p.A. deklaruoja, kad šis 2G/3G/LTE module atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.



xE910 Mini PCIe Hardware User Guide

1vv0301006 Rev.11 – 2017-05-15

Cet appareil est conforme aux limites d'exposition aux rayonnements de la IC pour un environnement non contrôlé. L'antenne doit être installée de façon à garder une distance minimale de 20 centimètres entre la source de rayonnements et votre corps. Gain de l'antenne doit être ci-dessous:

Bande de fréquence	LE910-NAG	LE910-NVG	LE910-SVG
700 MHz	8.74 dBi	9.16 dBi	6.93 dBi
850 MHz	6.93 dBi	9.42 dBi	N/A
1700 MHz	5.00 dBi	5.00 dBi	5.00 dBi
1900 MHz	2.51 dBi	8.01 dBi	N/A

L'émetteur ne doit pas être colocalisé ni fonctionner conjointement avec à autre antenne ou autre émetteur.

FCC Class B digital device notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Labelling Requirements for the Host device

The host device shall be properly labelled to identify the modules within the host device. The certification label of the module shall be clearly visible at all times when installed in the host device, otherwise the host device must be labelled to display the FCC ID and IC of the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

LE910-NAG

Contains FCC ID: RI7LE910NA
Contains IC: 5131A-LE910NA

LE910-NVG

Contains FCC ID: RI7LE910NV
Contains IC: 5131A-LE910NV

LE910-SVG

Contains FCC ID: RI7LE910SV
Contains IC: 5131A-LE910SV



xE910 Mini PCIe Hardware User Guide

1vv0301006 Rev.11 – 2017-05-15

L'appareil hôte doit être étiqueté comme il faut pour permettre l'identification des modules qui s'y trouvent. L'étiquette de certification du module donné doit être posée sur l'appareil hôte à un endroit bien en vue en tout temps. En l'absence d'étiquette, l'appareil hôte doit porter une étiquette donnant le FCC ID et le IC du module, précédé des mots « Contient un module d'émission », du mot « Contient » ou d'une formulation similaire exprimant le même sens, comme suit :

LE910-NAG

Contains FCC ID: RI7LE910NA

Contains IC: 5131A-LE910NA

LE910-NVG

Contains FCC ID: RI7LE910NV

Contains IC: 5131A-LE910NV

LE910-SVG

Contains FCC ID: RI7LE910SV

Contains IC: 5131A-LE910SV

CAN ICES-3 (B) / NMB-3 (B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.



14.5. **Conformity Assessment Issues / Problèmes d'évaluation de conformité (DE910)**

The DE910 is FCC/IC Approved as a module to be installed in other devices. This device should be used only for fixed and mobile applications and if the final product after integration is intended for portable use, a new application and FCC is required.

Le DE910 est approuvé FCC/IC comme module à installer dans d'autres dispositifs. Ce dispositif doit être utilisé uniquement pour des applications fixes et mobiles et si le produit fini est prévu après intégration pour un usage portatif, une nouvelle application et la FCC est requise

The user is cautioned that this device should be used only as specified within this manual to meet RF exposure requirements.

L'utilisateur est averti que ce dispositif doit être utilisé uniquement comme spécifié dans ce manuel pour répondre aux normes d'exposition aux ondes rf.

Use of this device in a manner inconsistent with this manual could lead to excessive RF exposure conditions.

L'utilisation de ce dispositif en quelque sorte contradictoire avec ce manuel a pu mener aux états excessifs d'exposition de rf.

The DE910 conforms to the following US Directives:

- Use of RF Spectrum. Standards: FCC47 Part 22&24
- EMC Standards: FCC47 Part 15

Le DE910 est conforme aux directives suivantes des USA

- Utilisation de spectre de rf. Normes : FCC47 partie 22&24
- Normes d'EMC : FCC47 partie 15

This device complies with Part 15 of the FCC Rules.

Ce dispositif est conforme à la partie 15 des règles FCC.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le fonctionnement est sujet aux deux conditions suivantes :

- (1) ce dispositif peut ne pas causer l'interférence nocive, et
- (2) ce dispositif doit accepter aucune interférence, y compris un interférence qui pourrait causer le fonctionnement non désiré du dispositif.

The user must refer to below information to meet the FCC/IC's RF exposure rules and regulations when they design:



xE910 Mini PCIe Hardware User Guide

1v0301006 Rev.11 – 2017-05-15

Lors de la conception, l'utilisateur doit se référer à l'information ci-dessous pour remplir les conditions et réglementations FCC/IC' d'exposition aux ondes RF:

- The system antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all the persons and must not be co-located or operating in conjunction with any other antenna or transmitter.
Le système d'antenne utilisé pour cet émetteur doit être installé à une distance d'au moins de 20 cm de toute personne et ne doit pas être co-implanté ou opérer en même temps que n'importe quelle autre antenne ou émetteur.
- The system antenna(s) used for this module must not exceed 5.12dBi in CDMA BC0 and 6.12dBi in CDMA BC1 for mobile and fixed or mobile operating configurations.
Le système d' antenne utilisé pour ce module ne doit pas dépasser 5.12dBi en CDMA BC0 et 6.12dBi en CDMA BC1 pour des configurations mobiles et fixes ou des configurations opérant en mode mobile.
- Users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance. Manufacturers of mobile, fixed or portable devices incorporating this module are advised to clarify any regulatory questions and to have their complete product tested and approved for FCC compliance.
Les instructions d'installation de l'antenne ainsi que les conditions de fonctionnement de l'émetteur doivent être remis aux utilisateurs et aux installateurs conformément à la réglementation sur l'exposition aux ondes rf. Des fabricants des dispositifs mobiles, fixes ou portables incorporant ce module sont invités à clarifier toutes les questions de normalisation et à avoir leur produit complètement testé pour la mise en conformité FCC.
- DE910 is intended for the OEM integrator only.
DE910 est prévu pour l'intégrateur OEM seulement.
- The user is required to see the Grant of Equipment document for other restrictions.
L'utilisateur doit se référer au document « Grant of equipment » pour d'autres restrictions.
- DE910 must be operated and used with a locally approved access point.
DE910 doit être actionné et utilisé avec un point d'accès localement approuvé.
- The radio transmitter(IC ID: 5131A-DE910DUAL) has been approved by Industry Canada to operate with the antenna type listed in this manual with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.
L'émetteur radio (identification d'IC : 5131A-DE910DUAL) a été approuvé par Industry Canada pour fonctionner avec le type d'antenne énuméré dans ce manuel avec le gain autorisé maximum et l'impédance d'antenne exigée pour chaque type d'antenne indiqué. Les types d'antenne non inclus dans cette liste, ayant un gain supérieur au gain maximum indiqué pour ce type, sont strictement interdits pour un usage avec ce dispositif.



1900 MHz

8.51 dBi

9.01 dBi

L'émetteur ne doit pas être colocalisé ni fonctionner conjointement avec à autre antenne ou autre émetteur.

FCC Class B digital device notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Labelling Requirements for the Host device

The host device shall be properly labelled to identify the modules within the host device. The certification label of the module shall be clearly visible at all times when installed in the host device, otherwise the host device must be labelled to display the FCC ID and IC of the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

LE910-NA V2



Contains FCC ID: RI7LE910NAV2
Contains IC: 5131A-LE910NAV2

LE910-SV V2

Contains FCC ID: RI7LE910SVV2
Contains IC: 5131A-LE910SVV2

L'appareil hôte doit être étiqueté comme il faut pour permettre l'identification des modules qui s'y trouvent. L'étiquette de certification du module donné doit être posée sur l'appareil hôte à un endroit bien en vue en tout temps. En l'absence d'étiquette, l'appareil hôte doit porter une étiquette donnant le FCC ID et le IC du module, précédé des mots « Contient un module d'émission », du mot « Contient » ou d'une formulation similaire exprimant le même sens, comme suit :

LE910-NA V2

Contains FCC ID: RI7LE910NAV2
Contains IC: 5131A-LE910NAV2

LE910-SV V2

Contains FCC ID: RI7LE910SVV2
Contains IC: 5131A-LE910SVV2

CAN ICES-3 (B) / NMB-3 (B)

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

14.7. Safety Recommendations (LE910 V2)

Be sure the use of this product is allowed in the country and in the environment required. The use of this product may be dangerous and has to be avoided in the following areas:



xE910 Mini PCIe Hardware User Guide

1v0301006 Rev.11 – 2017-05-15

- Where it can interfere with other electronic devices in environments such as hospitals, airports, aircrafts, etc.
- Where there is risk of explosion such as gasoline stations, oil refineries, etc.
It is responsibility of the user to enforce the country regulation and the specific environment regulation.

Do not disassemble the product; any mark of tampering will compromise the warranty validity. We recommend following the instructions of the hardware user guides for a correct wiring of the product. The product has to be supplied with a stabilized voltage source and the wiring has to be conforming to the security and fire prevention regulations. The product has to be handled with care, avoiding any contact with the pins because electrostatic discharges may damage the product itself. Same cautions have to be taken for the SIM, checking carefully the instruction for its use. Do not insert or remove the SIM when the product is in power saving mode.

The system integrator is responsible of the functioning of the final product; therefore, care has to be taken to the external components of the module, as well as of any project or installation issue, because the risk of disturbing the GSM network or external devices or having impact on the security. Should there be any doubt, please refer to the technical documentation and the regulations in force. Every module has to be equipped with a proper antenna with specific characteristics. The antenna has to be installed with care in order to avoid any interference with other electronic devices and has to guarantee a minimum distance from the body (20 cm). In case of this requirement cannot be satisfied, the system integrator has to assess the final product against the SAR regulation.

The European Community provides some Directives for the electronic equipment introduced on the market. All the relevant information's are available on the European Community website:

<http://ec.europa.eu/enterprise/sectors/rte/documents/>

The text of the Directive 99/05 regarding telecommunication equipment is available, while the applicable Directives (Low Voltage and EMC) are available at:



